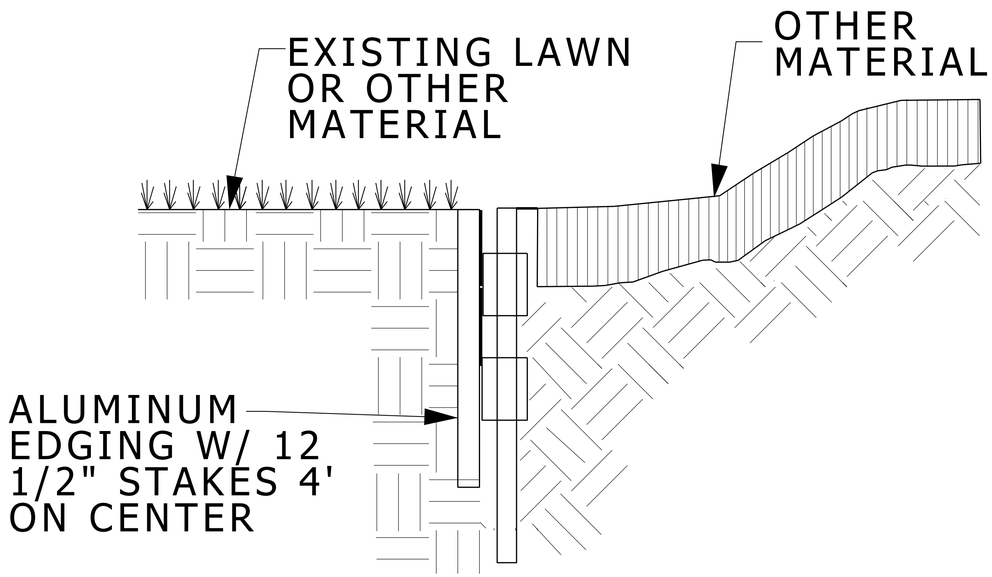


NOTE: MATERIALS TO BE FLUSH WITH THE TOP OF THE EDGING

MATERIALS:

A. EDGING WILL BE 3/16" THICK BY 4" HIGH ALUMINUM EDGING WITH A BLACK ANODIZED FINISH OR AS SPECIFIED ON THE DRAWINGS.
   1. PERMALOC - 1/800-356-9660
   2. CURV-RITE - 1/800-366-2878
   3. APPROVED EQUAL

B. STAKES WILL BE 12" PERMALOC LONG BLACK ANODIZED ALUMINUM ALLOY.

EXECUTION:

A. THE CONTRACTOR WILL STAKE THE LOCATION OF ALL ALUMINUM EDGING.
   1. CURVES WILL BE STAKED IN SUCH A MANNER AS TO ACCURATELY REFLECT THE FINISHED CURVE.
   2. CONTACT THE OWNER'S REPRESENTATIVE AFTER STAKING FOR APPROVAL.

B. INSTALL ALUMINUM EDGING IN STRAIGHT, TRUE LINES WITH THE TOP OF EDGING FLUSH WITH SURROUNDING MATERIAL. CURVES WILL BE SMOOTH FLOWING CONTINOUS LINES WITHOUT KINKS OR BENDS.

C. INSTALL STAKES ON THE INSIDE OF PLANTING BEDS. STAKES WILL BE NO GREATER THAN 4' APART.

ALUMINUM EDGING

NO SCALE

MD 329300 005 Aluminum Edging 7/27/18